





### IONODES – CENTRAL MONITORING

IonControlStation  
Client GPS Workstation

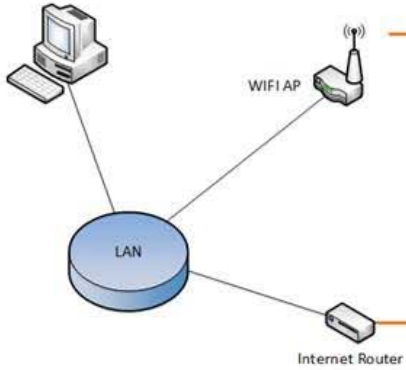

Client to OnBoard GPS connection can occur over WIFI or 3G connection, with WIFI being the priority.



### IONODES - ONBOARD GPS RECORDING SYSTEM



GPS / 3G / WIFI Antenna



CIRRUS CR16L APPLIANCE



20V to 30V Source  
w/ Ignition Signal



3G Wireless Router  
(if not using internal 3G)

Only needed if not using the internal 3G SIM card and radio found in the CR16L.

